

MINIATURE, GENERAL PURPOSE UNITS

F07 Filters- 1/8" PTF, 1/4" PTF



- Direct ported filters with high water removal efficiency
- Automatic drains supplied as standard
- High flow miniature unit
- Transparent bowl for 360° visibility

TECHNICAL DATA

Fluid:

Compressed air

Maximum pressure:

150 psig (10 bar)

Operating temperature:*

Transparent bowl:
-30° to 125°F (-34° to 50°C)

*Air supply must be dry enough to avoid ice formation at temperatures below 35°F (2°C)

Particle removal:

5 µm filter element

Air quality:

Within ISO 8573-1, Class 3 and Class 5 (particulates)

Drain connection:

1/8" male pipe thread


Materials

Body: zinc

Transparent bowl: Polycarbonate

Element: sintered polypropylene

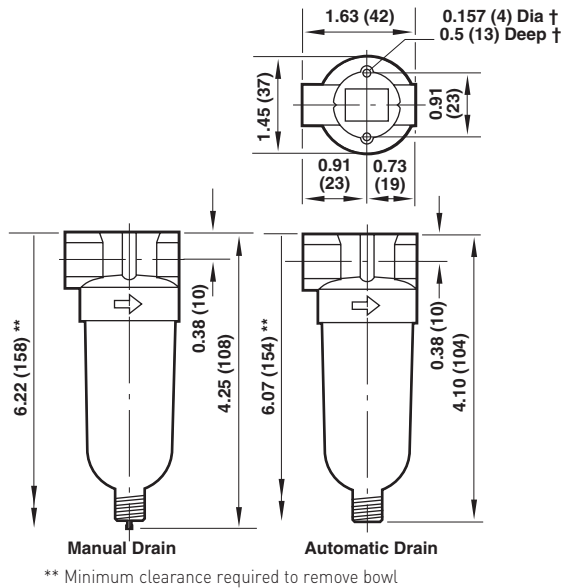

Elastomers: neoprene & nitrile






ISO Symbol



Models

F07 SERIES AUTO DRAIN Model No.	MANUAL DRAIN Model No.	Port size	Flow SCFM* (dm ³ /s)
		1/8"	19 (9)
F07-200-A1TA	F07-200-M1TA	1/4"	24 (11.5)

Accessories

Wall mounting bracket	Replacement element (5 µm)	Replacement element (40 µm)
		
5939-06	3652-17	3652-18

* Approximate flow at 90 psig (6.3 bar) inlet pressure and 5 psig (0.35 bar) pressure drop.

Service – Quality – Delivery

NorgrenExpress.com – 1.800.514.0129 – Help@NorgrenExpress.com



NORGREN
Express

ALE-29